


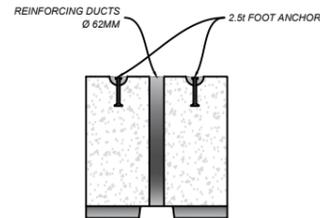






600 FLAT TOP BLOCK

DESCRIPTION	METRIC
• Width	600 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.36 m ²
• Volume (±)	0.206 m ³
• Weight (±)	500 kg







1200 FLAT TOP BLOCK

DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.72 m ²
• Volume (±)	0.413 m ³
• Weight (±)	1.00 TN

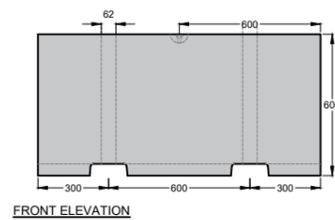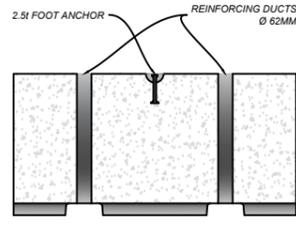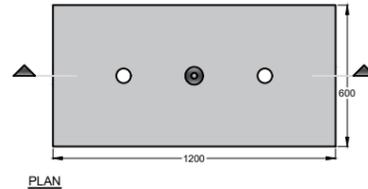

1800 FLAT TOP BLOCK

DESCRIPTION	METRIC
• Width	1800 mm
• Height	600 mm
• Depth	600 mm
• Face Area	1.08 m ²
• Volume (±)	0.620 m ³
• Weight (±)	1.50 TN

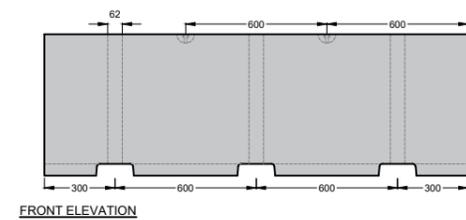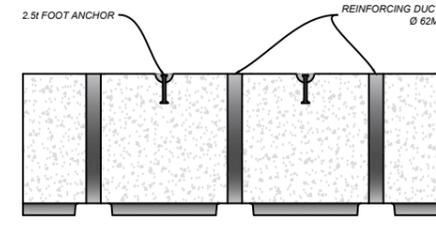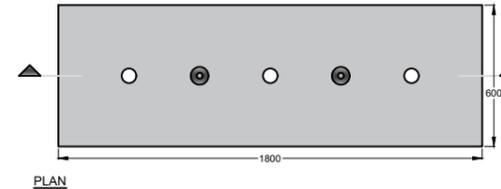

GENERAL NOTES:

These drawings are provided solely as preliminary guidance for wall design and are not suitable for final design or construction without further evaluation.

All site-specific walls must be certified and approved by an engineer licensed in the region where construction will occur, in accordance with New Zealand Standards and relevant building codes. Where applicable, building consent should also be obtained.

The user assumes full responsibility for verifying the accuracy and proper application of the details provided in this document.

Density Standards for Weight and Volume Calculations:

Concrete densities typically range from 2200 to 2500 kg/m³ in accordance with standard construction practices. It is important to note that variations in dimensions of 1 to 3 mm may result in different volume calculations, which can subsequently affect the estimated weight. These values are provided as estimates, as actual weights may vary based on the specific concrete mix used, any additives, and adherence to relevant New Zealand standards and policies.

Concrete Type:

Interbloc is primarily manufactured using high quality, certified, excess concrete. 100% of blocks are 20 MPa or greater, and 50% of blocks are 30 MPa or greater. Concrete is tracked from source and each block carries a unique barcode for tracking. You can find out more information about this in our articles on excess concrete, and quality.

Foot Anchor:

2.5t x 120mm SwiftLift™ Foot Anchor
1.3t x 120mm SwiftLift™ Foot Anchor
Compliance: NZ GPG 2018
System: Fully engineered with cast-in lifting anchors, recess formers, and lifting clutches
Working Load Limit (WLL): 2.5 or 1.3 tons
Factor of Safety (FoS): 4 for high tensile steel, exceeding NZ GPG 2018 minimum requirements

TITLE:
INTERBLOC® Product Specification and Reference Sheet





- Drawn by Sam Salari
- Checked by
- Approved by
- Scale @ A3 1:300
- Date 11/11/2024
- Sheet IB-01



www.envirocon.co.nz
www.envirobuild.co.nz
Address: 667B Great South Road,
Penrose, Auckland 1061
Phone: 0800 468 375





600 STANDARD BLOCK

DESCRIPTION	METRIC
• Width	600 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.36 m ²
• Volume (±)	0.214 m ³
• Weight (±)	500 kg

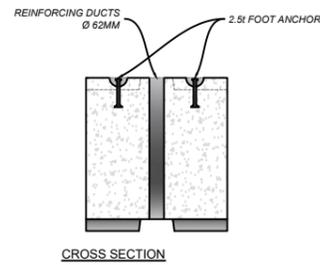





1200 STANDARD BLOCK

DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.72 m ²
• Volume (±)	0.428m ³
• Weight (±)	1.00 TN

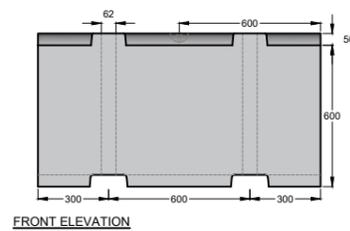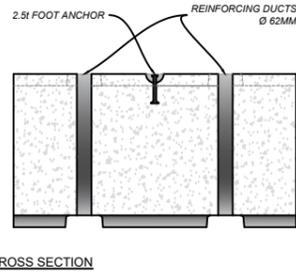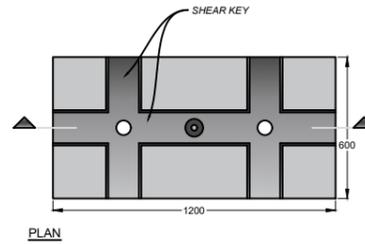

1800 STANDARD BLOCK

DESCRIPTION	METRIC
• Width	1800 mm
• Height	600 mm
• Depth	600 mm
• Face Area	1.08 m ²
• Volume (±)	0.642 m ³
• Weight (±)	1.50 TN

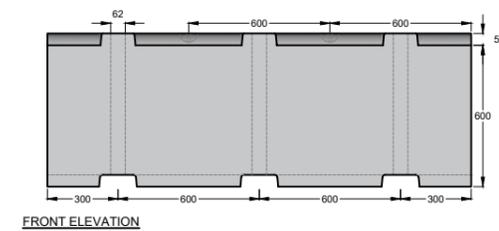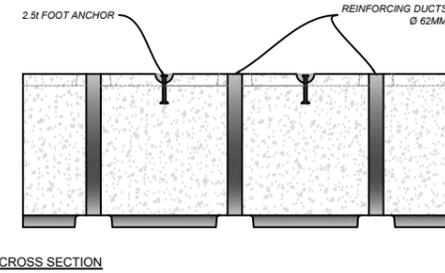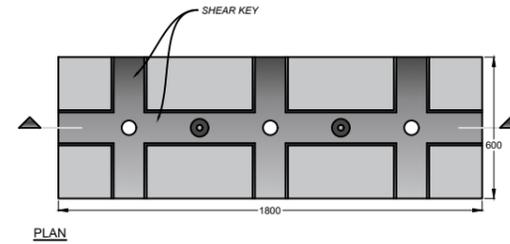

GENERAL NOTES:

These drawings are provided solely as preliminary guidance for wall design and are not suitable for final design or construction without further evaluation.

All site-specific walls must be certified and approved by an engineer licensed in the region where construction will occur, in accordance with New Zealand Standards and relevant building codes. Where applicable, building consent should also be obtained.

The user assumes full responsibility for verifying the accuracy and proper application of the details provided in this document.

Density Standards for Weight and Volume Calculations:

Concrete densities typically range from 2200 to 2500 kg/m³ in accordance with standard construction practices. It is important to note that variations in dimensions of 1 to 3 mm may result in different volume calculations, which can subsequently affect the estimated weight. These values are provided as estimates, as actual weights may vary based on the specific concrete mix used, any additives, and adherence to relevant New Zealand standards and policies.

Concrete Type:

Interbloc is primarily manufactured using high quality, certified, excess concrete. 100% of blocks are 20 MPa or greater, and 50% of blocks are 30 MPa or greater. Concrete is tracked from source and each block carries a unique barcode for tracking. You can find out more information about this in our articles on excess concrete, and quality.

Foot Anchor:

2.5t x 120mm SwiftLift™ Foot Anchor
1.3t x 120mm SwiftLift™ Foot Anchor
Compliance: NZ GPG 2018
System: Fully engineered with cast-in lifting anchors, recess formers, and lifting clutches
Working Load Limit (WLL): 2.5 or 1.3 tons
Factor of Safety (FoS): 4 for high tensile steel, exceeding NZ GPG 2018 minimum requirements

TITLE:
INTERBLOC® Product Specification and Reference Sheet





- Drawn by Sam Salari
- Checked by
- Approved by
- Scale @ A3 1:300
- Date 11/11/2024
- Sheet IB-02



www.envirocon.co.nz
www.envirobuild.co.nz
Address: 667B Great South Road,
Penrose, Auckland 1061
Phone: 0800 468 375





1200 FLAT BOTTOM BLOCK

DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.72 m ²
• Volume (±)	0.443 m ³
• Weight (±)	1.00 TN

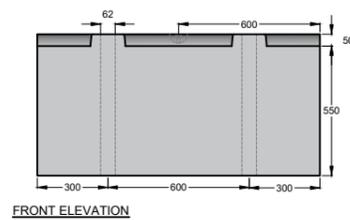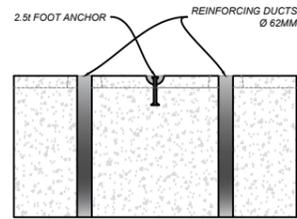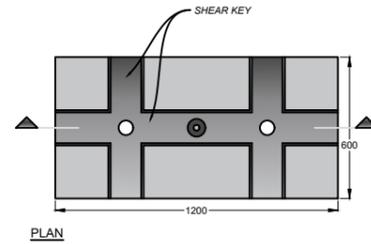

1800 FLAT BOTTOM BLOCK

DESCRIPTION	METRIC
• Width	1800 mm
• Height	600 mm
• Depth	600 mm
• Face Area	1.08 m ²
• Volume (±)	0.665 m ³
• Weight (±)	1.50 TN

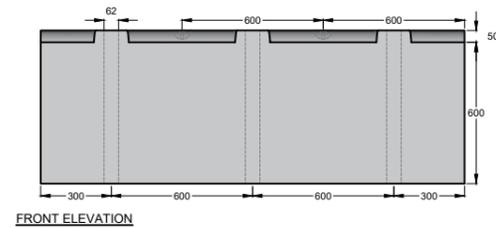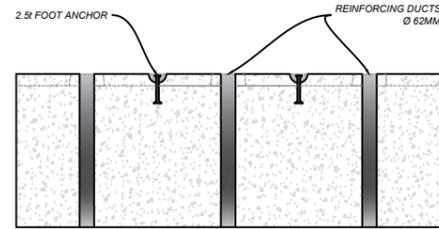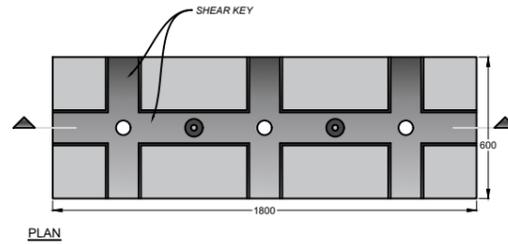

GENERAL NOTES:

These drawings are provided solely as preliminary guidance for wall design and are not suitable for final design or construction without further evaluation.

All site-specific walls must be certified and approved by an engineer licensed in the region where construction will occur, in accordance with New Zealand Standards and relevant building codes. Where applicable, building consent should also be obtained.

The user assumes full responsibility for verifying the accuracy and proper application of the details provided in this document.

Density Standards for Weight and Volume Calculations:

Concrete densities typically range from 2200 to 2500 kg/m³ in accordance with standard construction practices. It is important to note that variations in dimensions of 1 to 3 mm may result in different volume calculations, which can subsequently affect the estimated weight. These values are provided as estimates, as actual weights may vary based on the specific concrete mix used, any additives, and adherence to relevant New Zealand standards and policies.

Concrete Type:

Interbloc is primarily manufactured using high quality, certified, excess concrete. 100% of blocks are 20 MPa or greater, and 50% of blocks are 30 MPa or greater. Concrete is tracked from source and each block carries a unique barcode for tracking. You can find out more information about this in our articles on excess concrete, and quality.

Foot Anchor:

2.5t x 120mm SwiftLift™ Foot Anchor
 1.3t x 120mm SwiftLift™ Foot Anchor
 Compliance: NZ GPG 2018
 System: Fully engineered with cast-in lifting anchors, recess formers, and lifting clutches
 Working Load Limit (WLL): 2.5 or 1.3 tons
 Factor of Safety (FoS): 4 for high tensile steel, exceeding NZ GPG 2018 minimum requirements

TITLE:
INTERBLOC® Product Specification and Reference Sheet


- Drawn by Sam Salari
- Checked by
- Approved by
- Scale @ A3 1:300
- Date 11/11/2024
- Sheet IB-03




www.envirocon.co.nz
 www.envirobuild.co.nz
 Address: 667B Great South Road,
 Penrose, Auckland 1061
 Phone: 0800 468 375

1200 FLAT TOP RECESS BLOCK


DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.72 m ²
• Volume (±)	410 m ³
• Weight (±)	0.94 TN

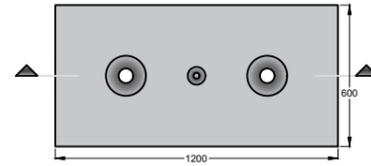


PLAN

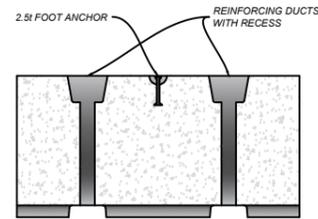

CROSS SECTION

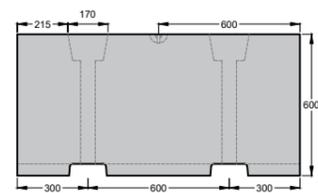


FRONT ELEVATION




SIDE ELEVATIONS

1800 FLAT TOP RECESS BLOCK


DESCRIPTION	METRIC
• Width	1800 mm
• Height	600 mm
• Depth	600 mm
• Face Area	1.08 m ²
• Volume (±)	0.615 m ³
• Weight (±)	1.415 TN

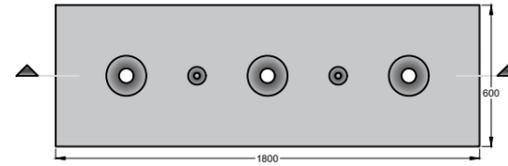


PLAN

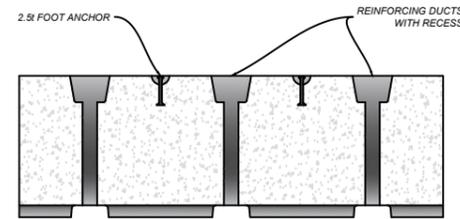

CROSS SECTION

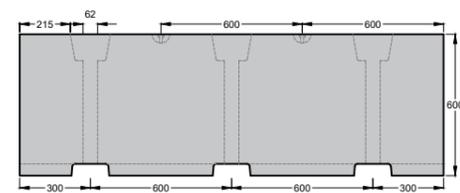

FRONT ELEVATION



SIDE ELEVATIONS

GENERAL NOTES:

These drawings are provided solely as preliminary guidance for wall design and are not suitable for final design or construction without further evaluation.

All site-specific walls must be certified and approved by an engineer licensed in the region where construction will occur, in accordance with New Zealand Standards and relevant building codes. Where applicable, building consent should also be obtained.

The user assumes full responsibility for verifying the accuracy and proper application of the details provided in this document.

Density Standards for Weight and Volume Calculations:

Concrete densities typically range from 2200 to 2500 kg/m³ in accordance with standard construction practices. It is important to note that variations in dimensions of 1 to 3 mm may result in different volume calculations, which can subsequently affect the estimated weight. These values are provided as estimates, as actual weights may vary based on the specific concrete mix used, any additives, and adherence to relevant New Zealand standards and policies.

Concrete Type:

Interbloc is primarily manufactured using high quality, certified, excess concrete. 100% of blocks are 20 MPa or greater, and 50% of blocks are 30 MPa or greater. Concrete is tracked from source and each block carries a unique barcode for tracking. You can find out more information about this in our articles on excess concrete, and quality.

Foot Anchor:

2.5t x 120mm SwiftLift™ Foot Anchor
 1.3t x 120mm SwiftLift™ Foot Anchor
 Compliance: NZ GPG 2018
 System: Fully engineered with cast-in lifting anchors, recess formers, and lifting clutches
 Working Load Limit (WLL): 2.5 or 1.3 tons
 Factor of Safety (FoS): 4 for high tensile steel, exceeding NZ GPG 2018 minimum requirements

TITLE:
INTERBLOC® Product Specification and Reference Sheet





- Drawn by Sam Salari
- Checked by
- Approved by
- Scale @ A3 1:300
- Date 11/11/2024
- Sheet IB-04

ENVIROCON
 CAPTURING CONCRETE EXCESS
 ENVIROBUILD INTERBLOC


www.envirocon.co.nz
 www.envirobuild.co.nz
 Address: 667B Great South Road,
 Penrose, Auckland 1061
 Phone: 0800 468 375

1200 BASE BLOCK


DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.58 m ²
• Volume (±)	0.339 m ³
• Weight (±)	780 kg

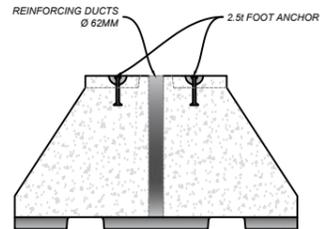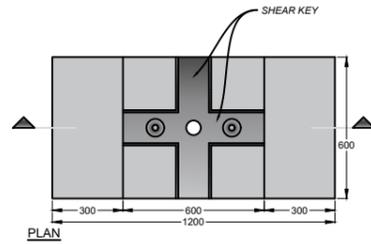

CROSS SECTION

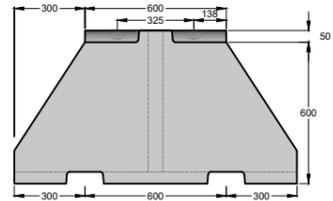



FRONT ELEVATION




SIDE ELEVATIONS

1200 CAPPER BLOCKS


DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.72 m ²
• Volume (±)	0.254m ³
• Weight (±)	585 kg

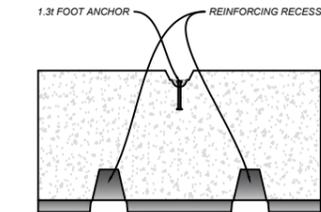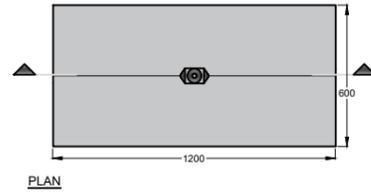

CROSS SECTION

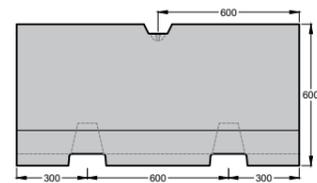



FRONT ELEVATION




SIDE ELEVATIONS

600 CAPPER BLOCKS


DESCRIPTION	METRIC
• Width	1200 mm
• Height	600 mm
• Depth	600 mm
• Face Area	0.36 m ²
• Volume (±)	0.127 m ³
• Weight (±)	290 kg

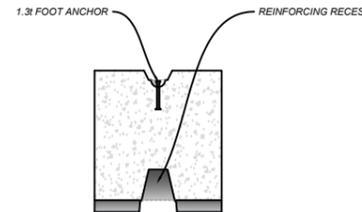

CROSS SECTION



FRONT ELEVATION



SIDE ELEVATIONS

GENERAL NOTES:

These drawings are provided solely as preliminary guidance for wall design and are not suitable for final design or construction without further evaluation.

All site-specific walls must be certified and approved by an engineer licensed in the region where construction will occur, in accordance with New Zealand Standards and relevant building codes. Where applicable, building consent should also be obtained.

The user assumes full responsibility for verifying the accuracy and proper application of the details provided in this document.

Density Standards for Weight and Volume Calculations:

Concrete densities typically range from 2200 to 2500 kg/m³ in accordance with standard construction practices. It is important to note that variations in dimensions of 1 to 3 mm may result in different volume calculations, which can subsequently affect the estimated weight. These values are provided as estimates, as actual weights may vary based on the specific concrete mix used, any additives, and adherence to relevant New Zealand standards and policies.

Concrete Type:

Interbloc is primarily manufactured using high quality, certified, excess concrete. 100% of blocks are 20 MPa or greater, and 50% of blocks are 30 MPa or greater. Concrete is tracked from source and each block carries a unique barcode for tracking. You can find out more information about this in our articles on excess concrete, and quality.

Foot Anchor:

2.5t x 120mm SwiftLift™ Foot Anchor
1.3t x 120mm SwiftLift™ Foot Anchor
Compliance: NZ GPG 2018
System: Fully engineered with cast-in lifting anchors, recess formers, and lifting clutches
Working Load Limit (WLL): 2.5 or 1.3 tons
Factor of Safety (FoS): 4 for high tensile steel, exceeding NZ GPG 2018 minimum requirements

TITLE:
INTERBLOC® Product Specification and Reference Sheet

- Drawn by Sam Salari
- Checked by
- Approved by
- Scale @ A3 1:300
- Date 11/11/2024
- Sheet IB-05



www.envirocon.co.nz
www.envirobuild.co.nz
Address: 667B Great South Road,
Penrose, Auckland 1061
Phone: 0800 468 375